HUSSMANN®

SELF-CONTAINED

DCCG-4

Curved Glass Ice Cream Dipping Display Merchandisers





DCCG

Curved Glass Ice Cream Dipping Display Merchandisers



DCCG-4, DCCG-8, DCCG-12, DCCG-16, DCCG-8-D, DCCG-12-D, DCCG-16-D

Design

Sleek new curved glass front and top looks great and improves product visibility. Maximum attention placed on product visibility by lowering the merchandiser front 2". Improved lid pivot design and lid gasketing.

Display

DCCG maximizes product display area within merchandiser. Interior canopy light provides added illumination of product display.

Refrigeration

All models feature R-404A CFC-free refrigerant. Rear air intake and discharge allow front and sides of merchandiser to be built into a fixed counter area. Merchandisers can be converted to rear air intake and front air discharge if required. Equipped with 115 volt, 15 amp power cord.

Warranty

Five years against insulation failure or leaks in insulated area. Five years against failure of compressor. One year against defective materials or faulty workmanship, including labor.



Optional Accessories

- Dipper Well
- Choice of Exterior
 Colors
- Lid Lock Kit
- Caster Kit
- Six-Inch Leg Kit
- Flavor Tabs
- Night Cover for Case Opening
- Stainless Steel Exterior
- Frost Shields

Optional Display Kits

Now available... a choice of two different ice cream canholder kits and a Gelato kit so you can choose the display accessories that best fit your needs.







Canholder Kit - New Style With Plastic Hood and Wire Rack System

"-D" Models With Rear Storage Doors

For easy "in and out" of tubs without disrupting service to customers (not applicable to DCCG-4).



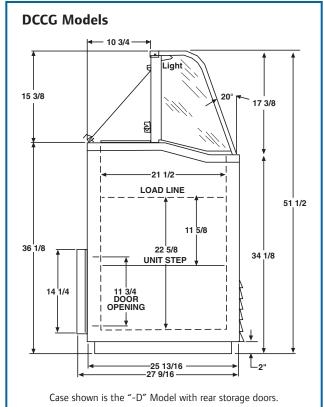

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

NOTE: For optimum performance, these models are designed for use in air conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes.

Specifications

	Capacity			Dimensions						Electrical - 60 Hz				
	9 1/2" Dia. 3-Gal. Cans		No.	Exterior			Interior		Unit		Run	LRA	Fuse	Ship.
	Display	Storage	Lids	L	W	Н	L	W	H.P.	Volts	Amps	Amps	Amps	Wt.
DCCG-4	4	0	1	253/8	2513/16	51 ¹ /2	21	21 ¹ / ₂	1/3	115	6.9	33.0	15	250
DCCG-8	8	4	1	477/16	2513/16	51 ¹ /2	43 ¹ /8	21 ¹ / ₂	1/2	115	9.5	58.0	15	405
DCCG-12	12	8	2	675/16	2513/16	51 ¹ /2	63	21 ¹ / ₂	1/2	115	9.9	45.0	15	515
DCCG-16	16	12	2	877/16	2513/16	51 ¹ /2	83 ¹ /8	21 ¹ / ₂	3/4	115	10.5	59.8	15	625

HUSSMANN®

Web Site: www.hussmann.com E-mail: hussmann-marketing@irco.com

Ingersoll Rand Climate Control Technologies



Hussmann Corporation 140 East State Street Gloversville, NY 12078 (518) 725-0644 (800) 753-7790 Fax: (518) 725-3801